

DPI 705E Series

Druck Handheld Indicators



Safe Area
Pressure Indicator



Hazardous Area
Pressure Indicator

The Druck DPI 705E Series of handheld pressure and optional temperature indicators combine tough and rugged design with accurate and reliable measurements.

Compact and robust, the DPI 705E Series is designed for single handed operation and provides many essential features required for routine maintenance and system troubleshooting.

Features

- 48 pressure ranges from ± 25 mbar to 1,400 bar (± 1.69 psi to 20,000 psi / 2.5 KPa to 140 MPa)
- Total 1 year uncertainty down to 0.05% full scale (FS) over temperature range of -10°C to $+50^{\circ}\text{C}$
- Integral calibration record with calibration due count-down display
- Rugged, handheld design with backlit high-contrast display
- Leak test, tare, maximum/minimum and filter
- Hazardous Area (Intrinsically safe) version available
- Optional remote plug and play pressure and Resistance Temperature Detector (RTD) sensors
- Optional pneumatic and hydraulic hand pumps

DPI 705E Improves Test Efficiency

- Power on and use. No warm up time required.
- 19 pressure measurement units (See below)
- 1, 3 or 5 minute leak test
- Impact resistant, sealed to IP54
- Large digit high-contrast LCD with backlight
- Optional carrying case with belt loop
- Optional magnetic/loop hanging strap
- Long battery life
- Integral desk stand and hanger

Special Features

Pressure Units

mbar, bar, Pa, hPa, Pa, MPa, psi, lb/ft², kgf/cm², kgf/m², mmHg(0°C), mHg(0°C), inHg 0, mmH₂O, cmH₂O, mH₂O, inH₂O (4°C, 20°C), ftH₂O (4°C, 20°C)

Calibration Certificates


- Supplied as standard with bar, psi and kPa
- Optional UKAS approved calibrations available

Leak Test

Used to determine if there is a leak in the system by recording the pressure change over of time.


Leak test can also be used with the RTD sensor to record a temperature change over time.

User defined 1, 3 or 5 minute leak test.

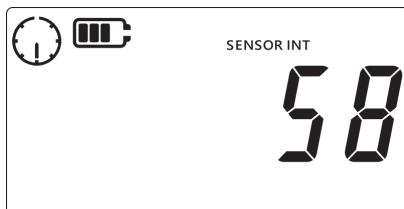

Maximum/Minimum

Captures both maximum and minimum readings in peak-hold mode.

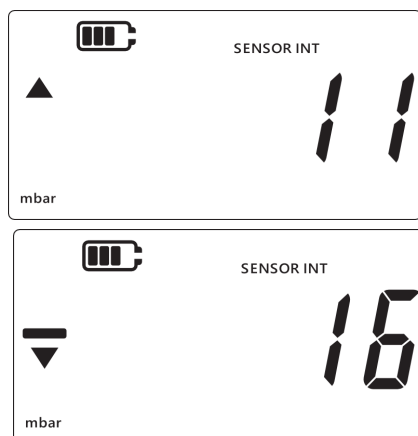

Zero

Zero pressure correction (gauge/differential sensors)

Tare

0 to 100% FS temporary zero offset capability by subtracting the current reading from subsequent measurements.

Filter

Enables a filtered pressure reading by showing a rolling average of the last 10 measurements. Providing a more stable reading of a noisy measurement.

Alarm

User adjustable; high and low pressure alarms with visual (Bell Icon, Pressure Reading and Backlight flash) and audible warning for 60 seconds.

Calibration

Used in conjunction with the optional pneumatic or hydraulic hand pumps, the DPI 705E Series provides a simple, low-cost calibration solution.



Battery

- 4 x AA Alkaline/NiCd/NiMH cells
- Power efficient design, can be used for 8 Hours per day, 6 days per week for 1 Year using a single set of batteries.

Display

16mm LCD with ±99999 readout

Approvals

- IS Class I, Groups A, B, C & D, T4 Ex ia; Class I, Zone 0, AEx/Ex ia IIC T4 Ga (-10°C ≤ Ta ≤ +50°C) to CSA Std. 157-92, UL 913 (7th Ed.), CAN/CSA-C22.2 No. 60079-0:2018, CAN/CSA-C22.2 No. 60079-11:2012, ANSI/UL 60079-0:2018 and ANSI/UL 60079-11:2012.
- Ex ia IIC T4 Ga (-10°C ≤ Ta ≤ +50°C) to ATEX IEC 60079-0:2017 and EN 60079-11:2011

Pressure Ranges

Internal and remote sensors are fitted with pressure connectors as detailed below:

- 25 mbar – 200 bar (10 inH₂O – 3000 psi / 2.5 kPa – 20 MPa): G1/8 BSP female
- Differential reference port: Legris 4 mm tubing adaptor
- ≥350 bar (5000 psi / 35 MPa): Autoclave 9/16 x 18 UNF Male

DPI 705E Internal Sensors

The DPI705E includes an internal Absolute, Gauge or Differential sensor.

Available ranges as per table:

Internal Sensor Availability					
Pressure Range	Abs	Gauge	Differential	Standard Accuracy	High Accuracy
25 mbar / 10 inH ₂ O / 2.5 kPa	-	✓	✓	✓	-
70 mbar / 1 psi / 7 kPa	-	✓	✓	✓	-
200 mbar / 3 psi / 20 kPa	-	✓	✓	✓	-
350 mbar / 5 psi / 35 kPa	✓	✓	✓	✓	✓
700 mbar / 10 psi / 70 kPa	✓	✓	✓	✓	✓
1 bar / 15 psi / 100 kPa	✓	✓	✓	✓	✓
2 bar / 30 psi / 200 kPa	✓	✓	✓	✓	✓
3.5 bar / 50 psi / 350 kPa	✓	✓	-	✓	✓
7 bar / 100 psi / 700 kPa	✓	✓	-	✓	✓
10 bar / 150 psi / 1000 kPa	✓	✓	-	✓	✓
20 bar / 300 psi / 2 MPa	✓	✓	-	✓	✓
35 bar / 500 psi / 3.5 MPa	✓	✓	-	✓	✓
70 bar / 1000 psi / 7 MPa	✓	✓	-	✓	✓
100 bar / 1500 psi / 10 MPa	✓	✓	-	✓	✓
135 bar / 2000 psi / 13.5 MPa	✓	✓	-	✓	✓
200 bar / 3000 psi / 20 MPa	✓	✓	-	✓	✓
350 bar / 5000 psi / 35 MPa	✓	-	-	✓	✓
700 bar / 10000 psi / 70MPa	✓	-	-	✓	✓

Note: Do not apply pressure greater than 1 bar (16 psi) absolute to the negative port of differential pressure indicators.

PM 700E External Remote Pressure Sensor

Any number of remote sensors can be used with a single DPI705E as all sensors hold their own calibration data and are supplied with a 2.9m (9.5 feet) cable

Available ranges as per table:

External Remote Sensor Availability					
Pressure Range	Abs	Gauge	Differential	Standard Accuracy	High Accuracy
25 mbar / 10 inH ₂ O / 2.5 kPa	-	✓	✓	✓	-
70 mbar / 1 psi / 7 kPa	-	✓	✓	✓	-
200 mbar / 3 psi / 20 kPa	-	✓	✓	✓	-
350 mbar / 5 psi / 35 kPa	✓	✓	✓	✓	✓
700 mbar / 10 psi / 70 kPa	✓	✓	✓	✓	✓
1 bar / 15 psi / 100 kPa	✓	✓	✓	✓	✓
2 bar / 30 psi / 200 kPa	✓	✓	✓	✓	✓
3.5 bar / 50 psi / 350 kPa	✓	✓	-	✓	✓
7 bar / 100 psi / 700 kPa	✓	✓	-	✓	✓
10 bar / 150 psi / 1000 kPa	✓	✓	-	✓	✓
20 bar / 300 psi / 2 MPa	✓	✓	-	✓	✓
35 bar / 500 psi / 3.5 MPa	✓	✓	-	✓	✓
70 bar / 1000 psi / 7 MPa	✓	✓	-	✓	✓
100 bar / 1500 psi / 10 MPa	✓	✓	-	✓	✓
135 bar / 2000 psi / 13.5 MPa	✓	✓	-	✓	✓
200 bar / 3000 psi / 20 MPa	✓	✓	-	✓	✓
350 bar / 5000 psi / 35 MPa	✓	-	-	✓	✓
700 bar / 10000 psi / 70 MPa	✓	-	-	✓	✓
1000 bar / 15000 psi / 100 MPa	✓	-	-	✓	✓
1400 bar / 20000 psi / 140 MPa	✓	-	-	✓	✓



PM700E (Gauge, Absolute)



PM700E (Differential)

Accuracy Levels

Total Uncertainty includes 1-year drift for both Standard and High accuracy levels.

- 1-Standard ±0.1% FS NLH&R over temperature, including non-linearity, hysteresis and repeatability.
- 2-High ±0.05% FS NLH&R over temperature, including non-linearity, hysteresis and repeatability.

Accuracy Specification

Absolute Sensors	Standard Accuracy		High Accuracy	
	NLH&R	Total Uncertainty	NLH&R	Total uncertainty
	-10 to 50°C (14 to 122°F)			
Pressure Range	(% FS)	(% FS)	(% FS)	(% FS)
350 mbar to 1400 bar	0.08	0.1	0.04	0.075

Gauge/Differential Sensors	Standard Accuracy		High Accuracy	
	NLH&R	Total Uncertainty	NLH&R	Total Uncertainty
	-10 to 50°C (14 to 122°F)			
Pressure Range	(% FS)	(% FS)	(% FS)	(% FS)
25 mbar	0.3	0.348	N/A	N/A
70 mbar	0.1	0.121	N/A	N/A
200 mbar	0.08	0.1	N/A	N/A
350 mbar to 700 mbar	0.08	0.1	0.04	0.05
1 bar to 200 bar	0.08	0.1	0.04	0.05

Note: NLH&R Non-linearity, hysteresis and repeatability.

Negative calibration option

- Negative calibration is an option OPI for gauge sensors up to 20 bar (300 psi / 2 MPa).
- Ranges below 1 bar (15 psi / 100 kPa) are calibrated to \pm FS \pm 200 mbar (\pm 3 psi / \pm 20 kPa).
- Ranges of 1 bar (15 psi / 20 kPa) and above are calibrated -1 bar (-15 psi / -100 kPa) to FS.

General Specifications	
Working Pressure	110% FS (alarm active beyond this range)
Sealing	IP54
Operating temperature	-10 to 50°C (14 to 122°F)
Storage temperature	-20 to 70°C (-4 to 158°F)
Humidity	0 to 90% RH non condensing
Shock and vibration	MIL-PRF-28800F for Class II equipment. 1 m Drop Tested @ -20°C (-4°F)
EMC	BS EN 61326-1
Electrical safety	BS EN 61010-1 UL 61010-1
Pressure safety	Pressure equipment directive class SEP. UL61010 Safe to 2xFS
Approval	CE marked
Size and weight	L 200 mm, W 95 mm, D 43 mm 563 g maximum
RoHS	Compliant
Media Compatibility	Media to be compatible with Stainless Steel and Hastelloy
Resolution	5 digits

Media Compatibility

Only fluids that are compatible with Stainless Steel and Hastelloy should be used. This is to ensure the integrity of the pressure sensor and avoid fluid leakage.

Optional remote RTD temperature Interface/Probe

Enabling users to perform plug and play temperature measurement capability, displaying units as resistance or temperature.

The Interface only option **P/N RTD-INTERFACE-485** for DPI705E Safe Area or **P/N RTD-INTERFACE-IS** for DPI705EIS Hazardous Area certification allows users to use their own PT100 RTD probe. **RTD-INTERFACE** supplied with a field-rewireable M12 connector to allow users to connect their own wire-ended RTD's.

The probe option **P/N RTD-PROBE-485** for DPI705E Safe Area or **P/N RTD-PROBE-IS** for DPI705EIS Hazardous Area comes with the interface and a 15 cm (6") class A PT100 probe.

For further options please see Accessories section.



RTD Interface Ohms Measurement		
Pressure Range	NLH&R	Total Uncertainty
	-10 to 50°C (14 to 122°F)	
	(% FS)	(% FS)
0 to 400 Ω	0.005	0.006

Notes:

- RTD NLH&R includes 24 hour stability.
- RTD Total Uncertainty includes 1 year drift.

Ordering Information for DPI705E Pressure indicator

The DPI 705E and DPI 705E-IS are supplied with a user guide and calibration certificate as standard.

Model Type

DPI705E Safe Area pressure indicator
DPI705EIS Hazardous Area pressure indicator

Accuracy (Now offering two levels of accuracy – see page 3 for availability by pressure range)

- 1** Standard
- 2** High

Pressure Range and Reference type; (Mandatory to select only one e.g. 008A for each configuration)

	Gauge (G)	Absolute (A)	Differential (L)
25 mbar / 10 inH2O / 2.5 kPa	008G	-	008L
70 mbar / 1 psi / 7 kPa	01G	-	01L
200 mbar / 3 psi / 20 kPa	02G	-	02L
350 mbar / 5 psi / 35 kPa	03G	03A	03L
700 mbar / 10 psi / 70 kPa	04G	04A	04L
1 bar / 15 psi / 100 kPa	05G	05A	05L
2 bar / 30 psi / 200 kPa	07G	07A	07L
3.5 bar / 50 psi / 350 kPa	08G	08A	-
7 bar / 100 psi / 700 kPa	10G	10A	-
10 bar / 150 psi / 1000 kPa	11G	11A	-
20 bar / 300 psi / 2 MPa	13G	13A	-
35 bar / 500 psi / 3.5 MPa	14G	14A	-
70 bar / 1000 psi / 7 MPa	16G	16A	-
100 bar / 1500 psi / 10 MPa	165G	165A	-
135 bar / 2000 psi / 13.5 MPa	17G	17A	-
200 bar / 3000 psi / 20 MPa	18G	18A	-
350 bar / 5000 psi / 35 MPa	-	20A	-
700 bar / 10000 psi / 70 MPa	-	22A	-

Pressure fitting

- P1** - G1/8 BSP Female *For ranges less than 350 bar*
- P2** - G1/4 BSP Female Adaptor *For ranges less than 350 bar*
- P3** - 1/8 NPT Female Adaptor *For ranges less than 350 bar*
- P4** - 1/4 NPT Female Adaptor *For ranges less than 350 bar*
- P5** - Quick-Fit Adaptor *For ranges less than 350 bar*
- P6** - 9/16 x 18 UNF Male *Mandatory for ranges greater than/equal to 350 bar*

Options

- OPI** - Negative Calibration *For Gauge ranges less than 35 bar*
(If this option is chosen, then the calibration certificate will include values down to -1 bar g.)

DPI705EIS - 1 - 07G - P2 (Example Part Number)

Ordering Information for PM700E External remote pressure sensors

The PM 700E and PM 700E-IS are supplied with a user guide and calibration certificate as standard.

Model Type

PM700E Safe Area External remote pressure sensor
PM700EIS Hazardous Area External remote pressure sensor

Accuracy (Now offering two levels of accuracy – see page 3 for availability by pressure range)

- 1 Standard
- 2 High

Pressure Range and Reference type; (Mandatory to select only one e.g. 008A for each configuration)

	Gauge (G)	Absolute (A)	Differential (L)
25 mbar / 10 inH2O / 2.5 kPa	008G	-	008L
70 mbar / 1 psi / 7 kPa	01G	-	01L
200 mbar / 3 psi / 20 kPa	02G	-	02L
350 mbar / 5 psi / 35 kPa	03G	03A	03L
700 mbar / 10 psi / 70 kPa	04G	04A	04L
1 bar / 15 psi / 100 kPa	05G	05A	05L
2 bar / 30 psi / 200 kPa	07G	07A	07L
3.5 bar / 50 psi / 350 kPa	08G	08A	-
7 bar / 100 psi / 700 kPa	10G	10A	-
10 bar / 150 psi / 1000 kPa	11G	11A	-
20 bar / 300 psi / 2 MPa	13G	13A	-
35 bar / 500 psi / 3.5 MPa	14G	14A	-
70 bar / 1000 psi / 7 MPa	16G	16A	-
100 bar / 1500 psi / 10 MPa	165G	165A	-
135 bar / 2000 psi / 13.5 MPa	17G	17A	-
200 bar / 3000 psi / 20 MPa	18G	18A	-
350 bar / 5000 psi / 35 MPa	-	20A	-
700 bar / 10000 psi / 70 MPa	-	22A	-
1000 bar / 15000 psi / 100 MPa	-	23A	-
1400 bar / 20000 psi / 140 MPa	-	24A	-

Pressure fitting

- P1** - G1/8 BSP Female *For ranges less than 350 bar*
- P2** - G1/4 BSP Female Adaptor *For ranges less than 350 bar*
- P3** - 1/8 NPT Female Adaptor *For ranges less than 350 bar*
- P4** - 1/4 NPT Female Adaptor *For ranges less than 350 bar*
- P5** - Quick-Fit Adaptor *For ranges less than 350 bar*
- P6** - 9/16 x 18 UNF Male *Mandatory for ranges greater than/equal to 350 bar*

Options

- OPI** - Negative Calibration *For Gauge ranges less than 35 bar*
(if this option is chosen, then the calibration certificate will include values down to -1 bar g.)

PM700E - 1 - - 07G - P2 (Example Part Number)

Options

OPI – Negative Calibration

Available for Gauge ranges lower than 35 bar. If this option is chosen, then the calibration certificate will include values down to -1 bar g.

UKAS Calibration

We also offer UKAS accredited calibrations, please advise at the time of order placement if required.

Accessories

Please state any accessories required as separate items when placing order.

The DPI 705E Safe and Hazardous area versions are compatible with the following accessories unless otherwise specified.

Part Code	Description
RTD-INTERFACE-485	RTD Interface only - RS485 (for Safe Area)
RTD-INTERFACE-IS	RTD IS Interface only - RS485 (for Hazardous Area)
RTD-PROBE-485	RTD Interface with PT100 probe - RS485 (for Safe Area)
RTD-PROBE-IS	RTD IS Interface with PT100 probe - RS485 (for Hazardous Area)
IO-RTD-MI2CON	Field wireable MI2 connector 4-pin to fit RTD-INTERFACE
IO-RTD-MI2EXT	RTD MI2 male to female extension lead 2 m (6.5 ft) 4-wire
IO-RTD-PRB150	150mm length 6mm diameter PT100 steel RTD probe Class A
PM700E-CABLE	Remote Sensor Extension Cable 2.9 m (9.5 ft)
IO705E-STRAP	Hanging Strap Magnetic/Loop
IO705E-CASE	Carry Case (for Safe Area)
IO705E-CASE-IS	Carry Case (for Hazardous Area)
IO-ADAPT-G1/4	G1/8 Male to G1/4 Female adaptor
IO-ADAPT-1/4NPT	G1/8 Male to 1/4NPT Female adaptor
IO-ADAPT-1/8NPT	G1/8 Male to 1/8NPT Female adaptor
IO-ADAPT-QF	G 1/8 quick-fit pressure adaptor
IOHOSE-NP1	Nylon hose, 1 m (3.2 ft) length (20 bar/300 psi MWP)
IOHOSE-NP2	Nylon hose, 2 m (6.5 ft) length (20 bar/300 psi MWP)
IO620-HOSE-P1	Pneumatic Hose, 1 m (3.2 ft) length (100 bar/1500 psi MWP)
IO620-HOSE-P2	Pneumatic Hose, 2 m (6.5 ft) length (100 bar/1500 psi MWP)
IO620-HOSE-H1	Hydraulic Hose, 1 m (3.2 ft) length (1000 bar/15000 psi MWP)
IO620-HOSE-H2	Pneumatic Hose, 2 m (6.5 ft) length (1000 bar/15000 psi MWP)
IO620-HOSE-P1-IS	Pneumatic Hose for Hazardous Area, 1 m (3.2 ft) length (100 bar/1500 psi MWP)
IO620-HOSE-P2-IS	Pneumatic Hose for Hazardous Area, 2 m (6.5 ft) length (100 bar/1500 psi MWP)
IO620-HOSE-H1-IS	Hydraulic Hose for Hazardous Area, 1 m (3.2 ft) length (1000 bar/15000 psi MWP)
IO620-HOSE-H2-IS	Hydraulic Hose for Hazardous Area, 2 m (6.5 ft) length (1000 bar/15000 psi MWP)
IO620-BSP	5 adaptors AMC Quick connect to (G1/4 F, G3/8 F, G1/2 F, G1/4 M, G1/8 M)
IO620-NPT	5 adaptors AMC Quick connect to (1/4NPT F, 3/8NPT F, 1/2NPT F, 1/4NPT M, 1/8NPT M)

Related Products

Process Calibrators

Druck offer a comprehensive range of portable pressure, temperature and electrical field calibrators. To help you select the right process calibration tools we have categorised our products into three ranges.

Druck's Essential range provides rugged, accurate and easy-to-use test and calibration tools.

Druck's Expert range introduces higher accuracy and increased functionality.

Druck's Elite range provides a modular system offering state-of-the-art multifunction communication and calibration.



PV212 High Pressure Hydraulic Hand Pump

Lightweight, easy to use, an ideal tool for calibrating pressure transmitters, pressure transducers, pressure switches and pressure gauges.

- Generates pressures up to 1000 bar (15,000 psi)
- Controlled pressure release and adjustment



PV411A Multifunction Hand Pump

High quality field proven pressure and vacuum hand pump. This product replaces four conventional hand pumps.

- Pneumatic pressures to 40 bar (600 psi)
- Hydraulic pressures to 700 bar (10,000 psi)
- Removable hydraulic reservoir which can be disconnected from the pump without draining the fluid
- Excellent low pressure control
- 95% vacuum



Pneumatic and Hydraulic Test Kits:

PV210 Low Pressure Pneumatic Hand Pump

Fully portable, easy to use, an ideal tool for low pressure calibration checks on pressure transmitters, pressure switches, indicators, recorders and controllers.

- Generates pressures to 3 bar (45 psi)
- Generates vacuum to 90%



PV211 Pneumatic Hand Pump

Lightweight, high quality combined pressure and vacuum hand pump, designed to provide maximum pneumatic pressures efficiently and effortlessly.

- Pneumatic pressures in excess of 40 bar (600 psi)
- Generates vacuum to 96%



Laboratory and Workshop Instruments

Druck's PACE Series offers a comprehensive range of pressure controllers and indicators.

Pressure Transducers and Transmitters

Druck offer a wide range of pressure transducers and transmitters including analog, digital and HART/Smart devices. Please contact BH for further information

Supporting Services

Druck's highly trained staff can support you, no matter where you are in the world. We can provide nationally accredited calibration (both initially and at periodic intervals), extended warranty terms, maintenance and even rental of portable or laboratory instruments. Please contact your local Druck customer care team for more information.

Druck.com

Copyright 2019. Baker Hughes Company. This material contains one or more registered trademarks of Baker Hughes Company and its subsidiaries in one or more countries. All third-party product and company names are trademarks of their respective holders.

920-697A

Baker Hughes 